

产品特性：

- 1、散热器采用铝合金压铸而成，有效散热，增长使用寿命；
- 2、产品简约大方，广角度深度防眩光设计；
- 3、进口高透PMMA面罩，光线均匀柔和；
- 4、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：

商场、酒店、超市、办公室等照明应用。

Product features:

- 1、The radiators are made of aluminum alloy, which can effectively heat the radiator and increase the service life.
- 2、The products are simple and generous, with wide Angle and deep anti-glare design.
- 3、To import the high penetrable PMMA mask, the light is even soft;
- 4、The constant current isolation drives the power supply, the light is not flashing, and the eye vision is protected effectively.



Applicable places: store, hotel, supermarket, office and other lighting applications.



MODEL: LC-BT0301-7

功率/Power: SMD 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥80  
 光束角/Beam Angle: 100°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 50 pcs



Product Size

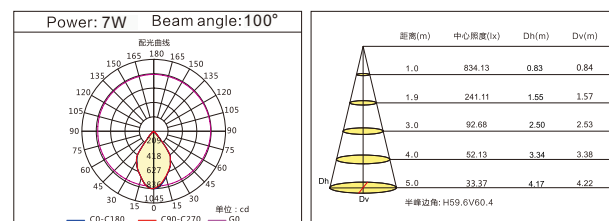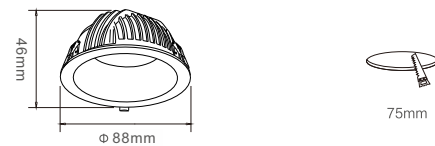

MODEL: LC-BT0301-10

功率/Power: SMD 10W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥80  
 光束角/Beam Angle: 100°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 24 pcs



Product Size

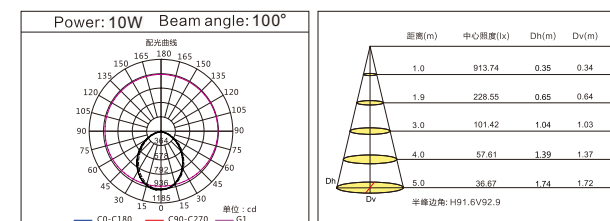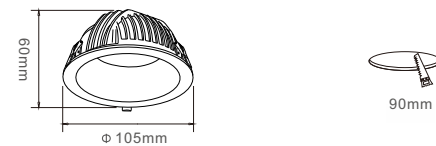

MODEL: LC-BT0301-15

功率/Power: SMD 15W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥80  
 光束角/Beam Angle: 100°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 24 pcs



Product Size

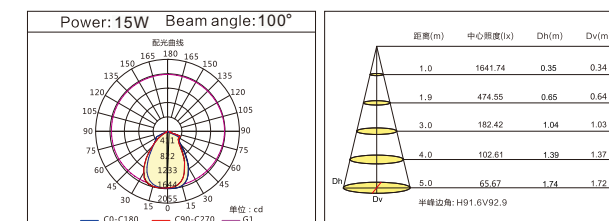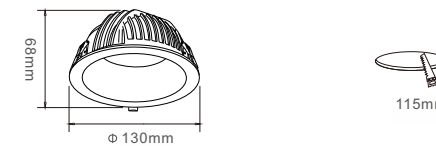

MODEL: LC-BT0301-25

功率/Power: SMD 25W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥80  
 光束角/Beam Angle: 100°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs

Product Size

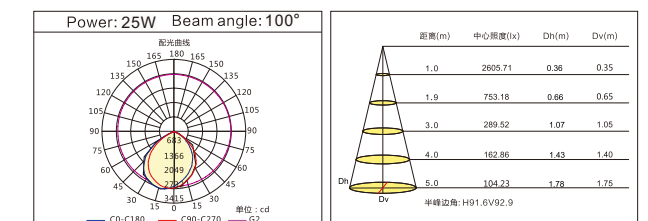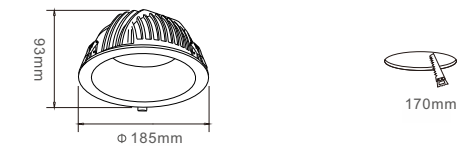

产品特性：

- 1、散热器采用铝合金压铸而成，有效散热，增长使用寿命；
- 2、产品简约大方，广角度深度防眩光设计；
- 3、进口高透PMMA面罩，光线均匀柔和；
- 4、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：

商场、酒店、超市、办公室等照明应用。



MODEL: LC-BT0301-35

光源类型/ Light Source: SMD

功率/Power: 35W

输入电压/Input Voltage: 180~240V

色温/CCT: 3000K/4000K/6000K

显色指数/CRI: Ra≥80


光束角/Beam Angle: 100°

材质/Material: 纯铝/Pure Aluminum


颜色选择/Color: 哑白/White

包装数量/Qty/Ctn: 12 pcs

Product Size



Light distribution curve

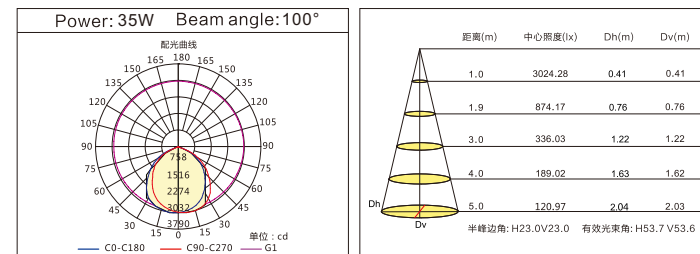



产品特性：

- 1、散热器采用压铸铝合金而成，有效散热，增长使用寿命；
  - 2、产品规格结构有可调节和不可调节两种；
  - 3、搭配光学反射器菲涅尔透镜反光杯，提高产品配光的准确性及专业性；
  - 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
  - 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；
- 适用场所：  
商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。

Product features:


- 1、The radiators are made of pure aluminium cold forging, which can effectively heat the heat and increase the service life.
  - 2、The product specification is complete, the double ring adjustment, the light can be made by the wanxiang adjustment.
  - 3、With a professional optical reflector and black moire glare, improve the accuracy and professionalism of the product.
  - 4、Select the integrated COB light source, the color index Ra ≥ 90, the light color saturation, effectively inhibits the blue ray damage;
  - 5、The constant current isolation drives the power supply, the light is not flashing, and the eye vision is protected effectively.
- Application places:  
Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.



MODEL: LC-BT0401-10

功率/Power: COB 10W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 36pcs


Product Size

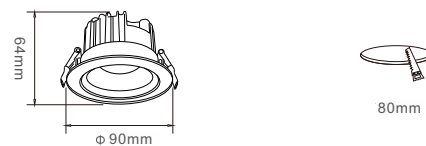

MODEL: LC-BT0401-15

功率/Power: COB 15W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs


Product Size

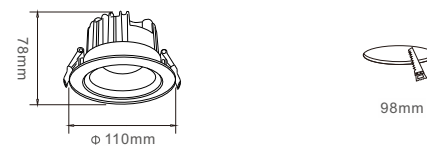

MODEL: LC-BT0401-20

功率/Power: COB 20W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs






Product Size

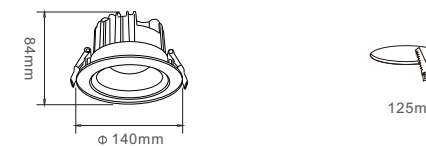

MODEL: LC-BT0401-30

功率/Power: COB 30W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs

Product Size

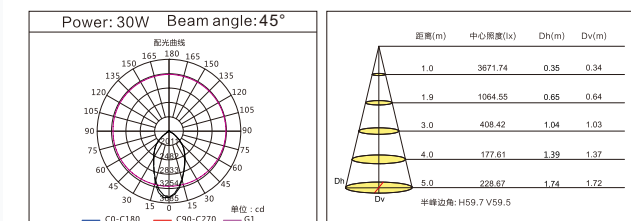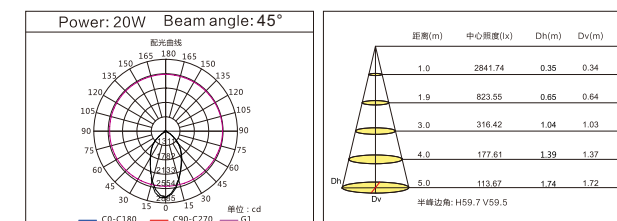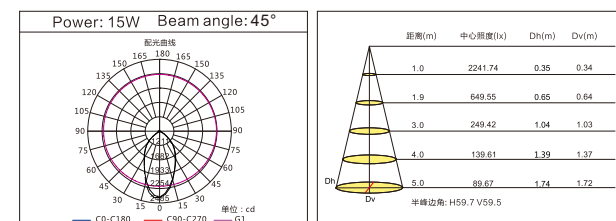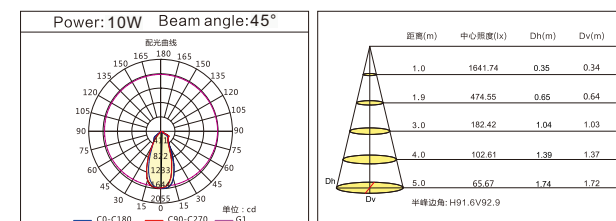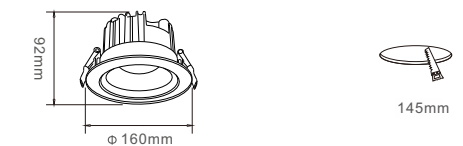

产品特性：

- 1、散热器采用压铸铝合金而成，有效散热，增长使用寿命；
- 2、产品规格结构有可调节和不可调节两种；
- 3、搭配光学反射器菲涅尔透镜反光杯，提高产品配光的准确性及专业性；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：



商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。



MODEL: LC-BT0402-10

功率/Power: COB 10W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 36pcs



Product Size

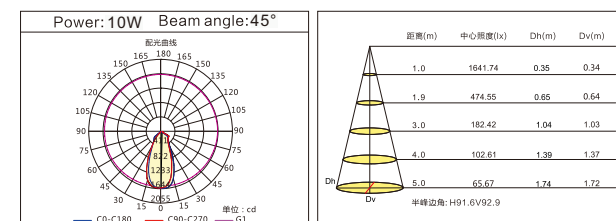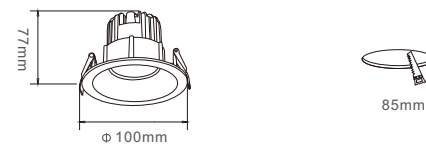

MODEL: LC-BT0402-15

功率/Power: COB 15W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs

Product Size

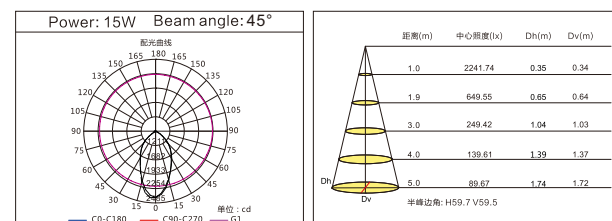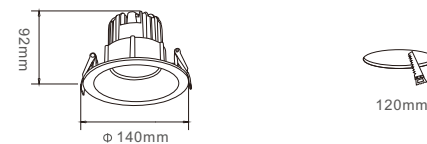

Product features:

- 1、The radiators are made of pure aluminium cold forging, which can effectively heat the heat and increase the service life.
- 2、The product specification is complete, the double ring adjustment, the light can be made by the wanxiang adjustment.
- 3、With a professional optical reflector and black moire glare, improve the accuracy and professionalism of the product.
- 4、Select the integrated COB light source, the color index Ra ≥ 90, the light color saturation, effectively inhibits the blue ray damage;
- 5、The constant current isolation drives the power supply, the light is not flashing, and the eye vision is protected effectively.

Application places:



Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.



MODEL: LC-BT0402-20

功率/Power: COB 20W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs



Product Size

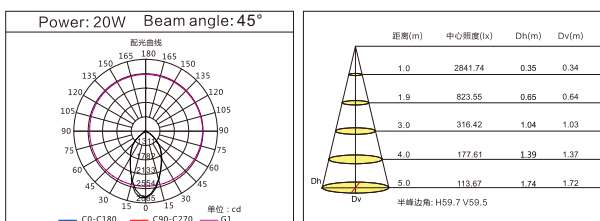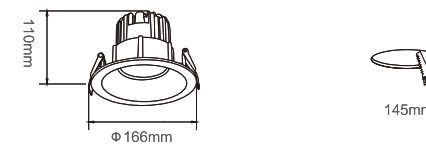

MODEL: LC-BT0402-30

功率/Power: COB 30W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 45°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs

Product Size

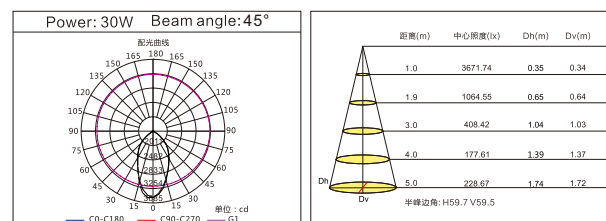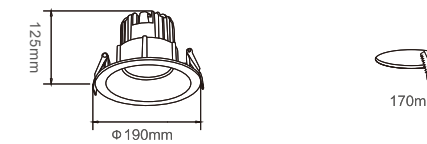





### 明装筒灯系列 CEILING MOUNTED LIGHT SERIES

明装筒灯，为满足安装时能达到保持建筑装饰的整体统一性，配以专业结构设计达到不破坏灯具的设置；反光杯采用优质1090纯铝旋压成型，阳极氧化工艺，专业二次光学设计，保证了无眩光，人的视觉效果柔和、均匀；采用COB芯片，全自动封装工艺，光色稳定，亮度高达85LM/W；采用恒流隔离驱动电源，光线无频闪，保护眼睛视力，质量更稳定，使用寿命长达50000h。

Ceiling mounted light, to meet the installation to keep building decoration of the overall unity, with professional design does not destroy the set of lamps and lanterns; Reflective glass is made of high quality 1090 spinning forming, pure aluminum anodic oxidation technology, specialized secondary optical design, ensure no glare, visual effect is soft, uniform. The COB chip, automatic packaging technology, light color stability, brightness 85 lm/W; Driven by constant current isolated power supply, no stroboscopic light, protect your eyes vision, quality more stable, the service life for up to 50000 h.



灯具整齐排列，同时起到照明、美化天花的作用，而且通过灯光起到一定的指引作用。



产品特性：

- 1、圆形灯体由镀锌铁板冲压而成，抗冲击性强；
- 2、产品外形美观大气，安装拆卸简便；
- 3、搭配光学反光杯，提高产品配光的准确性及专业性；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：



家具、酒店、展览厅、商业场所、车展大厅等照明应用。



MODEL: LC-BT0501-15

功率/Power: COB 15W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra ≥ 90  
 光束角/Beam Angle: 40°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 白/黑(White/Black)  
 包装数量/Qty/Ctn: 24 pcs



Product Size

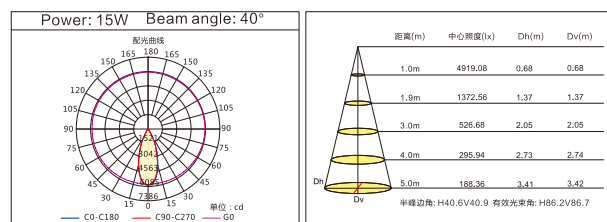

MODEL: LC-BT0501-20

功率/Power: COB 20W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra ≥ 90  
 光束角/Beam Angle: 40°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 白/黑(White/Black)  
 包装数量/Qty/Ctn: 18 pcs

Product Size

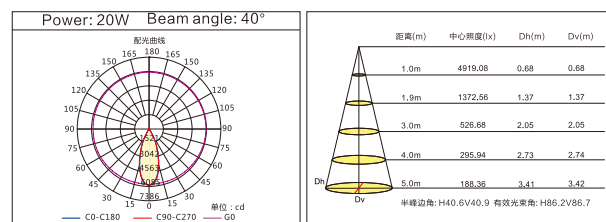

Product features:

- 1、The circular lamp body is made of galvanized iron plate and has strong impact resistance.
- 2、The product has a beautiful appearance, and the installation is easy to remove.
- 3、Matching optical reflective cups to improve the accuracy and professionalism of product distribution.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray injury;
- 5、Constant current no frequency flash drive power supply, the light has no frequency flashing, effectively protects the eye vision.

Application places:



Furniture, hotel, exhibition hall, commercial place, auto show hall and other lighting applications.



MODEL: LC-BT0501-30

功率/Power: COB 30W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra ≥ 90  
 光束角/Beam Angle: 40°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 白/黑(White/Black)  
 包装数量/Qty/Ctn: 12 pcs



Product Size

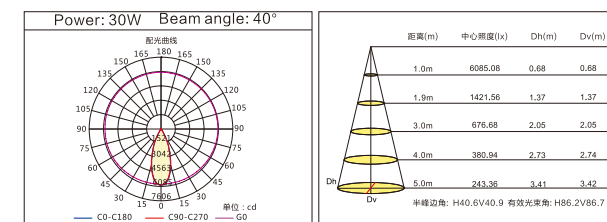

MODEL: LC-BT0501-40

功率/Power: COB 40W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra ≥ 90  
 光束角/Beam Angle: 40°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 白/黑(White/Black)  
 包装数量/Qty/Ctn: 8 pcs

Product Size

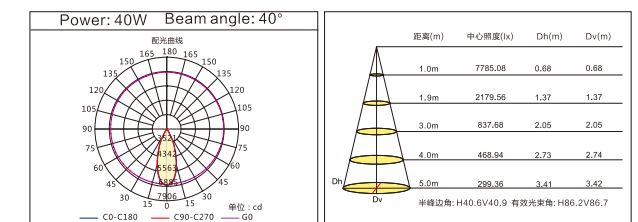



## 梦幻之光

灯体采用散热快、质量轻的镁合金AZ91D材料，导热系数达到418W/mK，可355°水平转动，30°向下调节，达到多方位调节性能；共用球体模具、可调焦模具，可满足各种重点投射的场所；西铁城光源，光色一致性高，显色指数Ra>90；锐高驱动，0-10V调光，高效稳定。

Dream Light Seris Spot Light, Adopt the material of AZ91D Magnesium Alloy with quick heat sink and low weight, Thermal Conductivity reach to 418W/mK. Rotatable horizontal 355° and vertical 30°, adjustable for different directions, Sphere mold and Beam Angle adjustable mold for options, the lamp can be used for different applications which need accent lighting. Use international top COB Citizen Chip, high consistency of the light color, CRI>90, Tridonic Driver, 0-10V dimmable, high efficiency and stable.



球体模组



平面模组



可调焦模组



### 电源驱动

采用锐高隔离式外置驱动；无频闪，有效保护眼睛；THD《15%，功率因素》0.95，转换效率》90%



### 镁合金散热器

采用散热快、质量轻的压铸镁合金AZ91D材料，导热系数达到418W/mK，高效散热，延长寿命




### 模组式光学件

球体模组、平面模组、可调焦模组三大模组可替换，适应不同场景需求；采用台湾浚光透镜，满足15° -55° 不同角度需求



### 西铁城COB光源

显色指数Ra>90 色容差小SCDM<3;通过LM-80测试；通过生物安全测试，有效保护眼睛。




### 挂耳式安装

挂耳式安装方式，安装、拆卸简单，避免拆装过程中损坏天花吊顶



### 磁吸式面环

磁吸式安装面板，简单轻便；超薄厚度，保持天花板与灯具整体协调性。





产品特性：

- 1、灯具采用压铸镁合金散热器，散热性能高，导热系数达到418W/mK；
- 2、产品规格齐全，水平355度调节，垂直30度角度调节，精准投光；
- 3、进口芯片，全自动封装，显色指数Ra≥90，真实还原色彩；
- 4、搭配光学可调角度反射器，提高产品配光的准确性及专业性；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

使用场所：

高级酒店、高级展览厅、高档餐厅、高档服装店、博物馆、画廊等照明应用。



MODEL: LC-AT0701-15/20/25 ( 梦幻之光 ) Light distribution curve

光源类型/ Light Source: COB

功率/Power: 15W/20W/25W

输入电压/Input Voltage: 180~240V

色温/CCT: 3000K/4000K/6000K


显色指数/CRI: Ra≥90

光束角/Beam Angle: 18°/23°/36°/45°


材质/Material: 纯镁/Pure Magnesium

颜色选择/Color: 白/黑(white/black)

包装数量/Qty/Ctn: 6 pcs

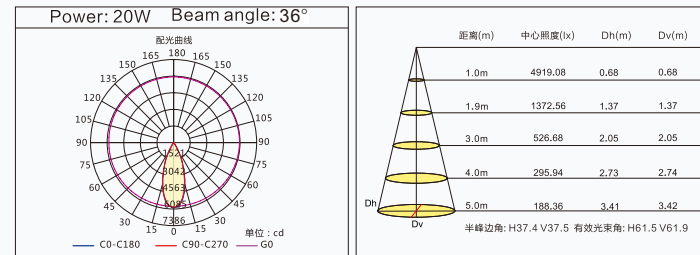

Product Size

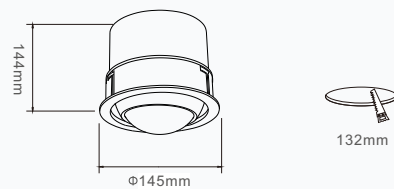

Product features:

- 1、Adopt the die casting magnesium alloy radiator of lamps and lanterns, heat dissipation performance, high coefficient of thermal conductivity of 418 W/mK;
- 2、Product specification is complete, the level of 355 degrees of adjustment, the vertical Angle of 30 degrees adjustment, precision cast light;
- 3、Imported chip, automatic packaging, color rendering index Ra 90 or higher, real restore color;
- 4、With optical reflector adjustable Angle, improve the accuracy of product light distribution and professionalism;
- 5、No stroboscopic constant current drive power supply, no stroboscopic light, effectively protect your eyes vision;

Application places:

Department stores, hotels, exhibition halls, high-end restaurants, high-end clothing stores, jewelry chains, boutiques and other lighting applications.



MODEL: LC-AT0702-15/20/25 ( 梦幻之光 ) Light distribution curve

光源类型/ Light Source: COB

功率/Power: 15W/20W/25W

输入电压/Input Voltage: 180~240V

色温/CCT: 3000K/4000K/6000K


显色指数/CRI: Ra≥90

光束角/Beam Angle: 18°/23°/36°/45°


材质/Material: 纯镁/Pure Magnesium

颜色选择/Color: 白/黑(white/black)

包装数量/Qty/Ctn: 6 pcs

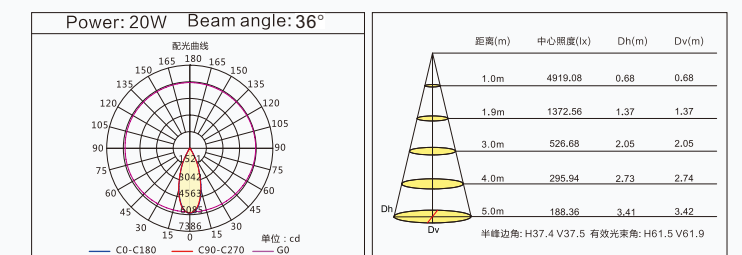

Product Size

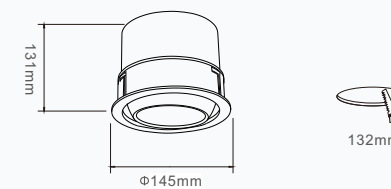

产品特性：

- 1、灯具采用压铸铝合金散热器，散热性能高，导热系数达到418W/mK；
- 2、产品规格齐全，水平355度调节，垂直30度角度调节，精准投光；
- 3、进口芯片，全自动封装，显色指数Ra≥90，真实还原色彩；
- 4、搭配光学可调角度反射器，提高产品配光的准确性及专业性；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

使用场所：

高级酒店、高级展览厅、高档餐厅、高档服装店、博物馆、画廊等照明应用。



MODEL: LC-AT0703-15/20/25 (梦幻之光) Light distribution curve

光源类型/ Light Source: COB

功率/Power: 15W/20W/25W

输入电压/Input Voltage: 180~240V

色温/CCT: 3000K/4000K/6000K


显色指数/CRI: Ra≥90

光束角/Beam Angle: 15~55°



材质/Material: 纯镁/Pure Magnesium

颜色选择/Color: 白/黑(white/black)

包装数量/Qty/Ctn: 6 pcs

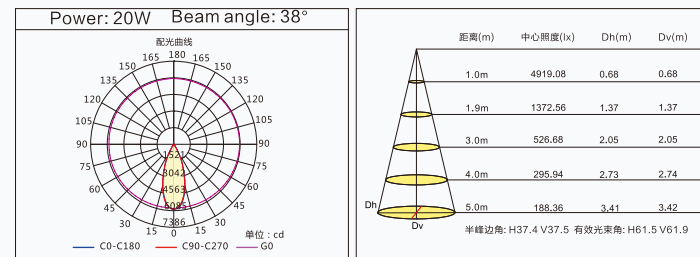

Product Size

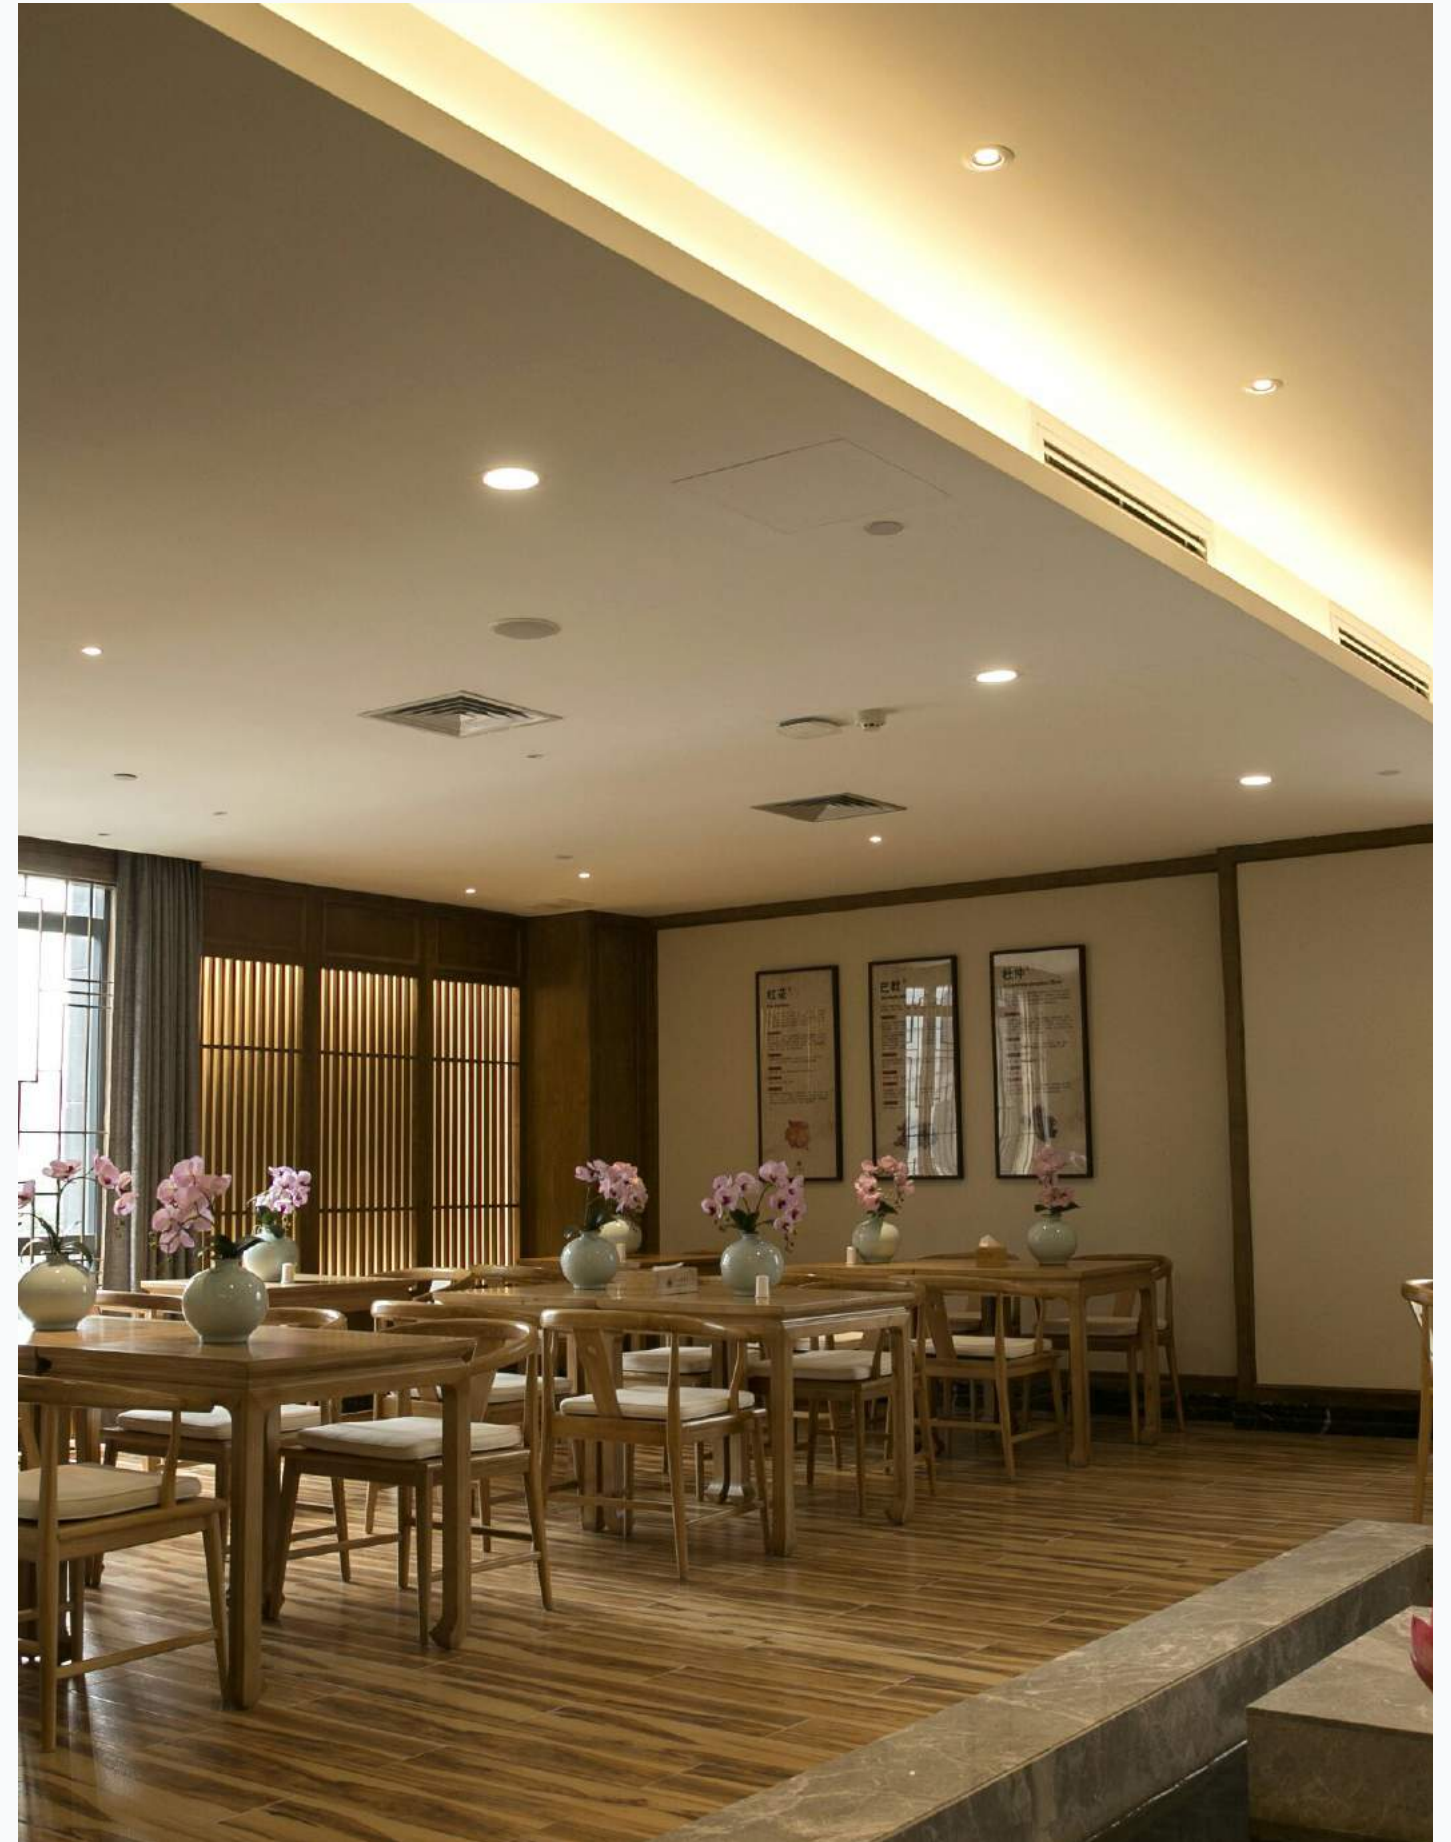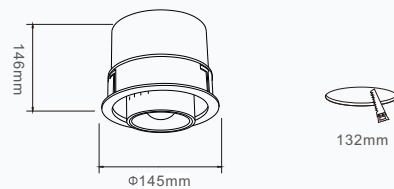

产品特性：

- 1、散热器采用进口ADC12铝合金压铸而成，有效散热，增长使用寿命；
- 2、产品规格齐全，结构设计具有可调与不可调，照射方向可满足多种场所；
- 3、搭配防眩圈，提高产品防眩值，有效降低眼睛疲劳度；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：



商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。



MODEL: LC-AT0601-7 (灵秀系列1)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27pcs



Product Size

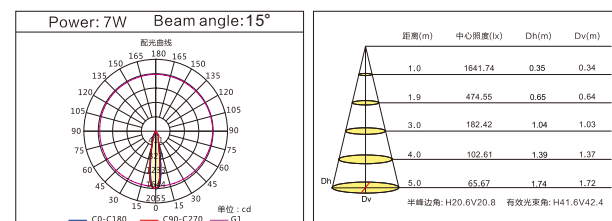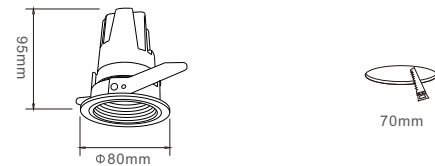

MODEL: LC-AT0602-7 (灵秀系列2)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs

Product Size

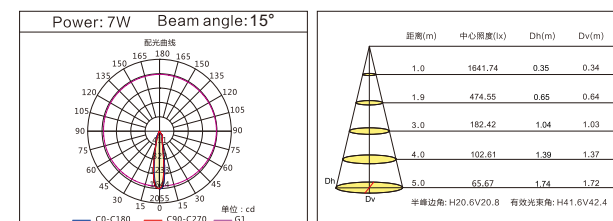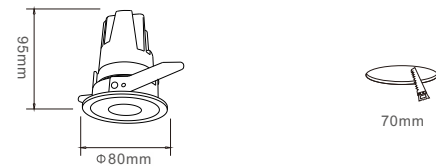

Product features:

- 1、The radiator adopts the imported ADC12 alloy die casting, effective heat dissipation, growth service life.
- 2、The product specification is complete, the structure design has adjustable and unadjustable, the illuminate direction can satisfy a variety of places;
- 3、Tie-in anti-dazzle ring, improve the anti-glare value of products, effectively reduce the fatigue of the eyes.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray damage.
- 5、The constant current has no stroboscopic power supply, the light is not flashing, effectively protects the eye vision;

Application places:



Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.



MODEL: LC-AT0603-7 (灵秀系列3)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27pcs



Product Size

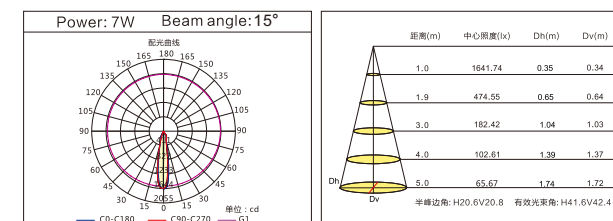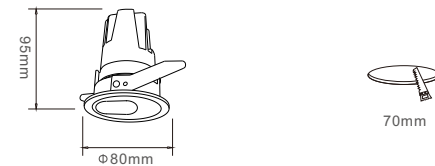

MODEL: LC-AT0604-7 (灵犀系列1)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs

Product Size

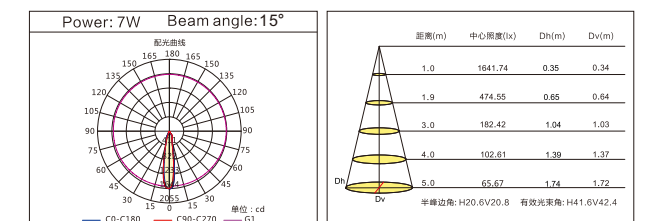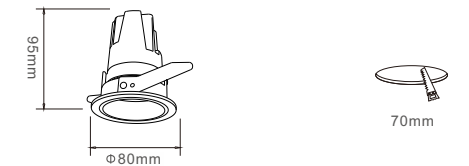



产品特性：

- 1、散热器采用进口ADC12铝合金压铸而成，有效散热，增长使用寿命；
- 2、产品规格齐全，结构设计具有可调与不可调，照射方向可满足多种场所；
- 3、搭配防眩圈，提高产品防眩值，有效降低眼睛疲劳度；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：



商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。



MODEL: LC-AT0605-7 (灵犀系列2)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27pcs



Product Size

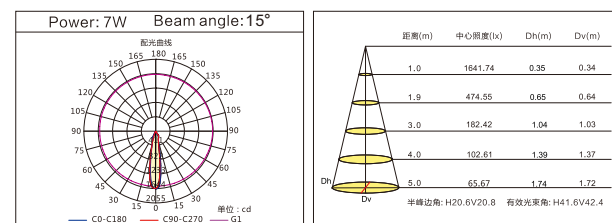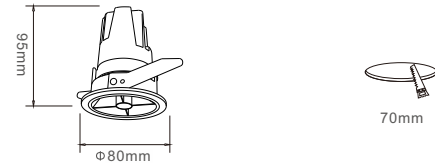

MODEL: LC-AT0606-7 (灵犀系列3)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs

Product Size

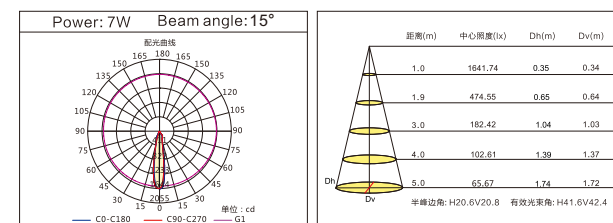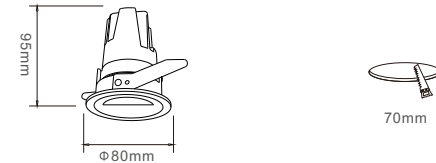

Product features:

- 1、The radiator adopts the imported ADC12 alloy die casting, effective heat dissipation, growth service life.
- 2、The product specification is complete, the structure design has adjustable and unadjustable, the illuminate direction can satisfy a variety of places;
- 3、Tie-in anti-dazzle ring, improve the anti-glare value of products, effectively reduce the fatigue of the eyes.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray damage.
- 5、The constant current has no stroboscopic power supply, the light is not flashing, effectively protects the eye vision;

Application places:



Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.



MODEL: LC-AT0607-7 (灵动系列1)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27pcs



Product Size

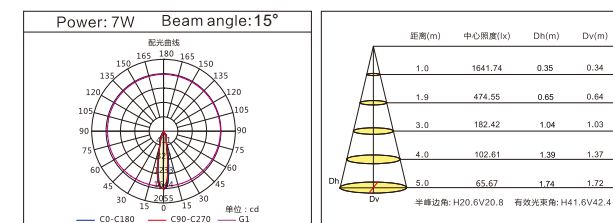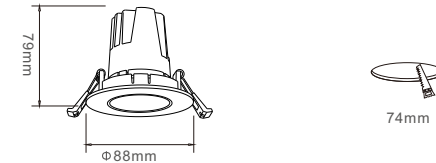

MODEL: LC-AT0608-7 (灵动系列2)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 15°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs

Product Size

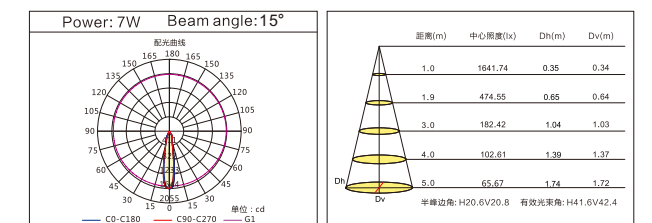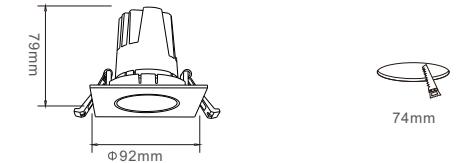




## 象鼻筒灯系列 GIMBAL DOWNLIGHT SERIES

象鼻筒灯，为实现整体墙面达到光照均匀舒适的理想效果，采用进口ADC12铝合金，专业开发创新结构设计--3D散热设计，通风对流散热，导热系数高达96.5W/MK以上；进口注塑仪器，专业的二次光学设计反光杯，保证了光视角控制，光斑均匀，抛物线曲面设计，投射效果更好，能更有效的降低光损15%；新一代COB光源，全自动封装工艺技术，光色稳定；采用恒流无频闪驱动电源，质量更稳定，使用寿命长达50000h光线无频闪，保护眼睛视力。

Trunk canister light, to achieve the ideal of the whole metope to achieve uniform illumination comfortable effect, USES the import ADC12 aluminum alloy, professional development innovative structural design, 3 d thermal design, ventilation convection, heat conduction coefficient of 96.5 W/MK above; Imported injection molding instrument, professional secondary optical design reflective cup, guaranteed optical Angle control, smooth spot uniformity, parabolic curved surface design, the projection effect is better, can reduce the light loss 15% more effectively; New generation COB light source, automatic packaging process technology, light color stability; The constant current stroboscopic power supply is adopted, the quality is more stable, and the service life is 50000h.

## 产品尺寸

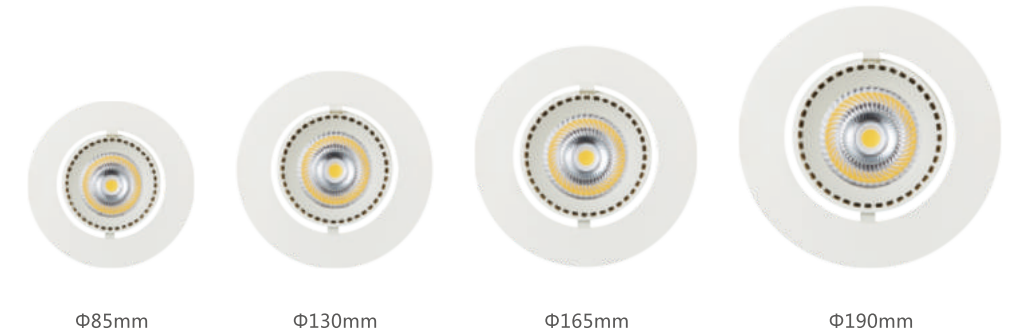

## 产品简介

材质说明：产品散热部分使用ADC12铝合金压铸铝制造

处理工艺：整体采用喷漆和阳极氧化处理，产品表面不易氧化。

散热技术：散热采用锻压成型技术，热阻小，传导好，导热系数高达236W/mk；散热面积大，科学的空气对流设计，散热效果佳。

光学技术：专业的光学设计，配光准确，反射器采用1090/1098高反射铝材经真空电镀处理，光利用率高。

Material Description: All of our product use pure Aluminum 6063 to produce, and the rate of aluminum metal purity is up to 95%.

Proceession technology: The product will treat with the processing of circle drawbench and anodizing, painting and it is not easy to rust.

Radiator technology: Our radiator choose forging and molding technology, which can decrease the thermal resistance, and improve the conduction of heating, and the thermal conductivity is up 236W/mk. Scientific design of the air convection, and have enough the cooling area can make sure the thermal conductivity.

Optical technology: We will pay more attention in professional optical design, and our reflector will use the 1090/1098 high reflective aluminum and processing by vacuum metallization which can increase the rate of utilization of light.





产品特性：

- 1、散热器采用进口ADC12铝合金压铸而成，3D散热设计，散热系数高达96.5W/MK，增长使用寿命；
- 2、产品规格齐全，结构设计可多方位调节照射角度，可满足多种重点照明场所；
- 3、搭配二次光学设计灯杯，抛物线曲面设计，投光效果更好；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：



商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。



MODEL: LC-XB0101-7 (象鼻灯系列)

功率/Power: COB 7W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 48 pcs



Product Size

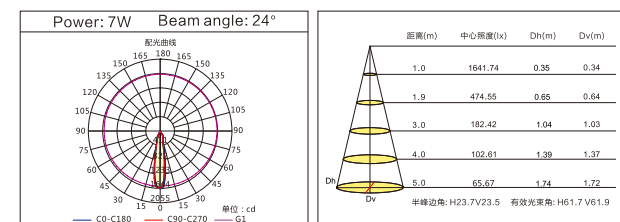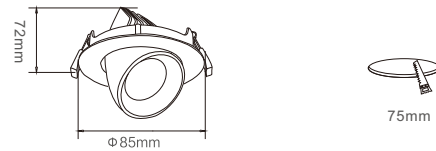

MODEL: LC-XB0101-15 (象鼻灯系列)

功率/Power: COB 15W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 27 pcs

Product Size

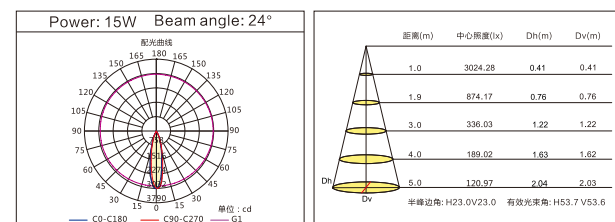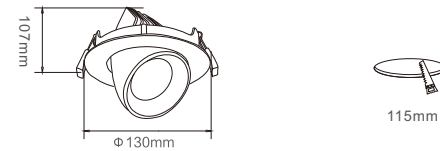

Product features:

- 1、The radiator adopts the imported ADC12 aluminum alloy die casting, the 3D heat dissipation design, the heat dissipation coefficient as high as 96.5 W/MK, the growth service life.
- 2、The product specification is complete, the structure design can be multi-azimuthal adjustment illuminate Angle, can satisfy a variety of key lighting place;
- 3、The second optical design lamp cup, the parabolic curved surface design, the lighting effect is better.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray damage.
- 5、The constant current has no stroboscopic power supply, the light is not flashing, effectively protects the eye vision;

Application places:



Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.



MODEL: LC-XB0101-30 (象鼻灯系列)

功率/Power: COB 30W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24° / 38° / 60°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs



Product Size

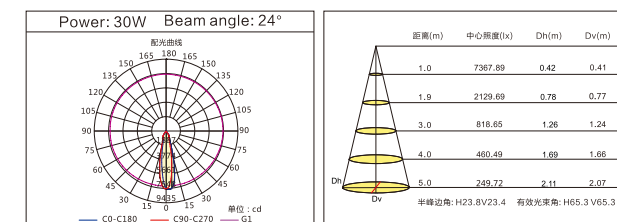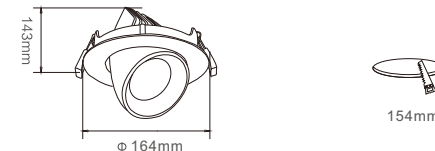

MODEL: LC-XB0101-40 (象鼻灯系列)

功率/Power: COB 40W  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24° / 38° / 60°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 8 pcs

Product Size

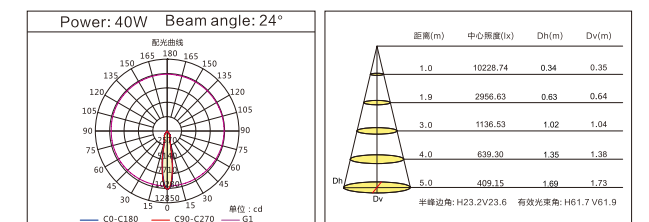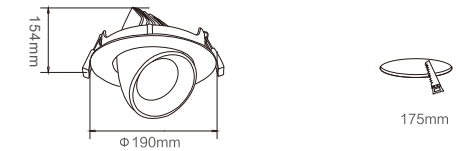





## 格栅灯系列 GRILLE LIGHT SERIES

格栅灯，从光应用的使用方向设计，通过对光学认知而进行专业设计，实现其价值所在；一体多灯结构设计，造型简洁大方；可灵活调节投射方向与角度，同时满足多点投射的照明要求；采用专业的二次光学设计，能有效满足对光照范围与亮度的需求；采用新一代集成式COB光源，全自动封装工艺技术，光色稳定，亮度高达85LM/W 采用恒流无频闪驱动电源，质量更稳定，使用寿命长达50000h 光线无频闪，保护眼睛视力。

Grille lamp, design from the use of light application, make professional design through the optical recognition, and realize its value; More than one lamp structure design, concise and easy model; Can flexibly adjust the projection direction and Angle, and satisfy the lighting requirement of multipoint projection; Adopting the secondary optical design, can meet the requirements for light scope and brightness professional and effectively; Using new generation of integrated COB chip, automatic packaging technology, light color stability, brightness up to 85 lm/W; With no stroboscopic constant current driver, more stable, lifespan over 50000 h, no flash, protect eyesight.

## 格栅灯 Grille light

### 产品特性:

灯具采用铝合金纯铝散热器，有效散热，增长使用寿命；

表面静电喷粉处理，附着力好，经久耐用；

产品规格齐全，多种光束角，灯头可伸缩调节，营造不同的光照效果；

选用集成式COB光源，显色指数 $Ra \geq 90$ ，真实还原色彩；

搭配专业的光学反射器，大大提高产品配光的准确性及专业性；

采用恒流隔离驱动电源，光线无频闪，有效保护眼睛视力；

### 适用场所:

商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。

### Product features:

The lamp body adopts aluminum alloy of heat dissipation, lengthen working life span.

Surface process with electrostatic powder spraying, protect the body color effectively, durable;

With fully dimension and different angle, lamp head can be adjusted making different light effect.


Choose COB source with  $CRI \geq 90$ , to restore true color.

Design with professional reflector, greatly improve the light distribution precisely and professionally.

Driven by constant current isolated power supply, no stroboscopic light, effectively protecting eyesight.

### Application places:

Shopping mall, Hotel, Exhibition Hall, Fashion garment shop, jewelry chain store, boutique shop etc.



## 销售区域照明

销售区是商场的真正核心所在，这个区域的照明根据各区域所销售商品的品类、品牌的不同，而有不同的照明方式选择，同时，品牌的不一样对灯具的要求和设计风格也要求相差很大。

Sales areas are the real core of mall, the lighting solution of sales areas have different ways according to the category, brand of each area of goods. At the same time, there are big difference of the requirements and design to the lamps between different brand.



产品特性：

- 1、散热器采用纯铝冷锻压铸而成，有效散热，增长使用寿命；
- 2、产品规格齐全，双环调节，照射方向可做万向调整；
- 3、搭配黑色台阶式防眩圈，提高产品防眩值，有效降低眼睛疲劳度；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：


商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。




MODEL: LC-GT0101-7/15/25 ( 祥云系列 ) Product Size

光源类型/ Light Source: COB  
 功率/Power: 15Wx1  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CR: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 24 pcs


7Wx1

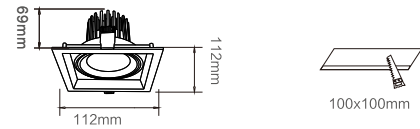


15Wx1



25Wx1



Light distribution curve

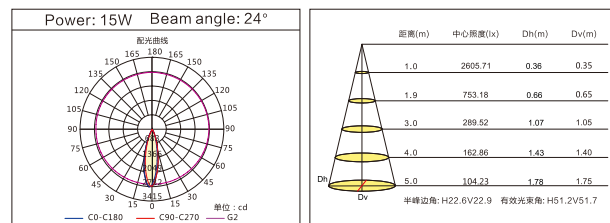

Product features:

- 1、The radiators are made of pure aluminum cold forging, effective heat dissipation and life span.
- 2、The product specification is complete, the double loop adjustment, the direction of irradiation can be made to make the adjustment;
- 3、Tie-in black terraced anti-dazzle ring, improve the anti-glare value of products, effectively reduce the fatigue of the eyes.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray damage.
- 5、The constant current has no stroboscopic power supply, the light is not flashing, effectively protects the eye vision;

Application places:


Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.




MODEL: LC-GT0102-14/30/50 ( 祥云系列 ) Product Size

光源类型/ Light Source: COB  
 功率/Power: 15Wx2  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CR: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 24 pcs


7Wx2

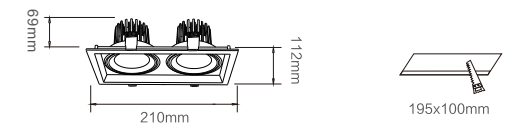


15Wx2

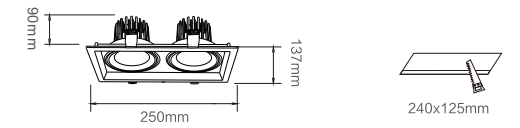

25Wx2

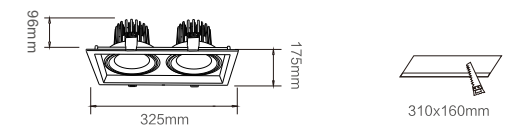

Product Size

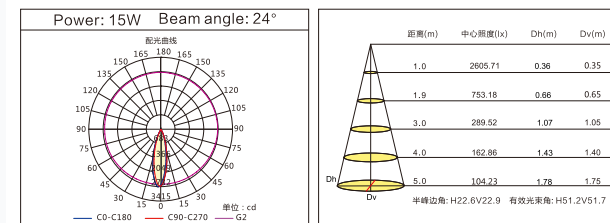

产品特性：

- 1、散热器采用纯铝冷锻压铸而成，有效散热，增长使用寿命；
- 2、产品规格齐全，双环调节，照射方向可做方向调整；
- 3、搭配黑色台阶式防眩圈，提高产品防眩值，有效降低眼睛疲劳度；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：


商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。




MODEL: LC-GT0103-21/45/75 ( 祥云系列 ) Product Size

光源类型/ Light Source: COB  
 功率/Power: 15Wx3  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs


7Wx3

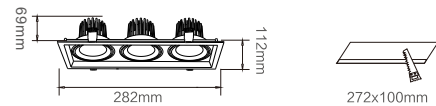


15Wx3

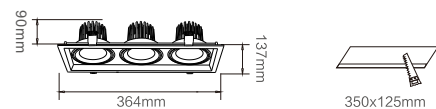

25Wx3

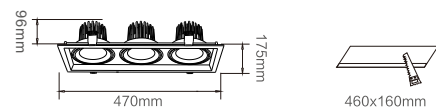

Light distribution curve

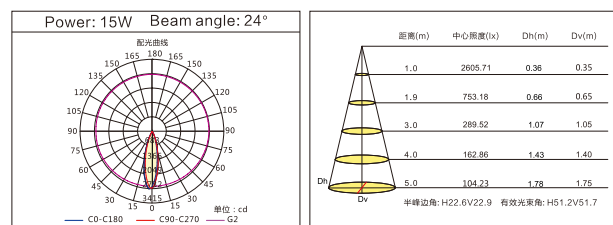


Product features:

- 1、The radiators are made of pure aluminum cold forging, effective heat dissipation and life span.
- 2、The product specification is complete, the double loop adjustment, the direction of irradiation can be made to make the adjustment;
- 3、Tie-in black terraced anti-dazzle ring, improve the anti-glare value of products, effectively reduce the fatigue of the eyes.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray damage.
- 5、The constant current has no stroboscopic power supply, the light is not flashing, effectively protects the eye vision;

Application places:


Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.

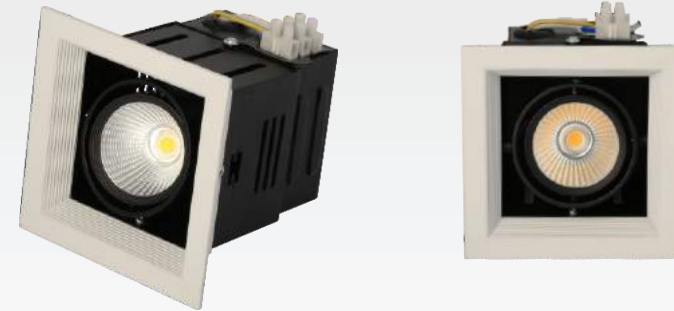


MODEL: LC-GT0201-7/15/25 ( 祥龙系列 ) Product Size

光源类型/ Light Source: COB  
 功率/Power: 25Wx1  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 12 pcs


7Wx1

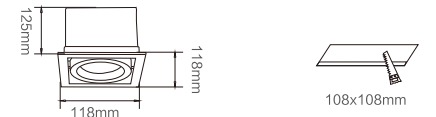


15Wx1

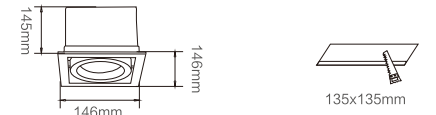

25Wx1

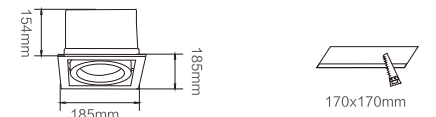

Product Size

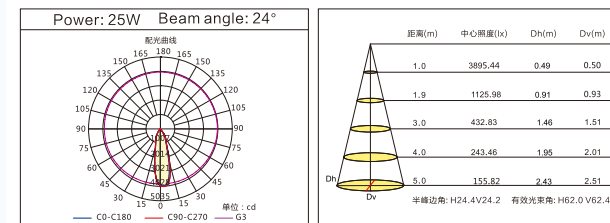



产品特性：

- 1、散热器采用纯铝冷锻压铸而成，有效散热，增长使用寿命；
- 2、产品规格齐全，双环调节，照射方向可做方向调整；
- 3、搭配黑色台阶式防眩圈，提高产品防眩值，有效降低眼睛疲劳度；
- 4、集成COB光源，显色指数Ra≥90，光色饱和，有效抑制蓝光伤害；
- 5、恒流无频闪驱动电源，光线无频闪，有效保护眼睛视力；

适用场所：

商场、酒店、展览厅、高档服装店、珠宝首饰连锁店、精品店等照明应用。

Product features:

- 1、The radiators are made of pure aluminum cold forging, effective heat dissipation and life span.
- 2、The product specification is complete, the double loop adjustment, the direction of irradiation can be made to make the adjustment;
- 3、Tie-in black terraced anti-dazzle ring, improve the anti-glare value of products, effectively reduce the fatigue of the eyes.
- 4、Integrated COB light source, the color index Ra is greater than 90, the color saturation is saturated, which effectively inhibits the blue ray damage.
- 5、The constant current has no stroboscopic power supply, the light is not flashing, effectively protects the eye vision;


Application places:

Department stores, hotels, exhibition halls, high-end clothing stores, jewelry chains, boutiques and other lighting applications.




MODEL: LC-GT0202-14/30/50 (祥龙系列) Product Size

光源类型/ Light Source: COB  
 功率/Power: 25Wx2  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 8 pcs

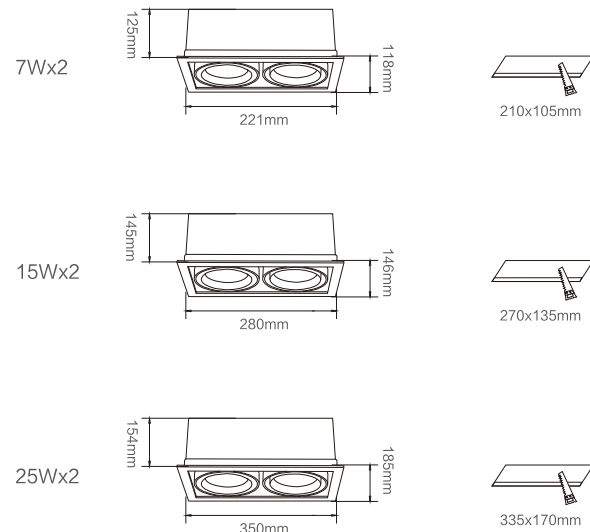


Light distribution curve

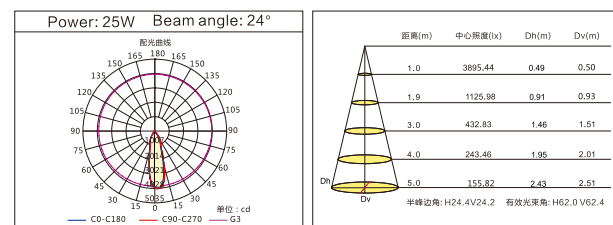

MODEL: LC-GT0203-21/45/75 (祥龙系列) Product Size

光源类型/ Light Source: COB  
 功率/Power: 25Wx3  
 输入电压/Input Voltage: 180~240V  
 色温/CCT: 3000K/4000K/6000K  
 显色指数/CRI: Ra≥90  
 光束角/Beam Angle: 24°  
 材质/Material: 纯铝/Pure Aluminum  
 颜色选择/Color: 哑白/White  
 包装数量/Qty/Ctn: 6 pcs

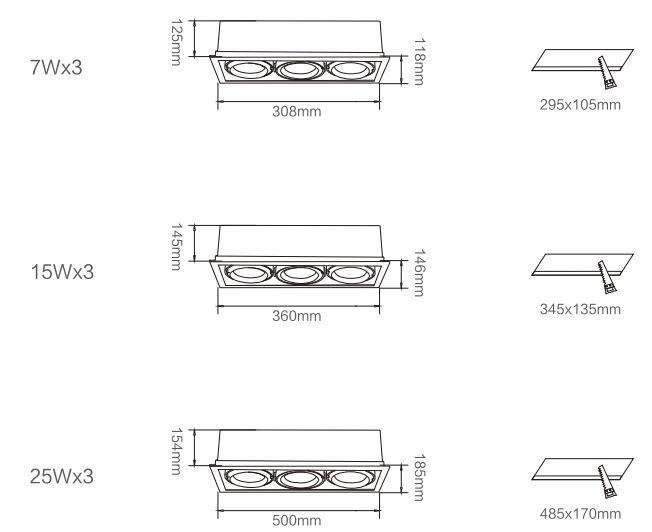

Light distribution curve

