



Low-Carbon Lighting&Technology Co., Ltd

T:+86(0)757 85611759

F:+86(0)757 85611749

E:sales03@lowcarbon-led.com

W:www.lowcarbon-led.com

Skype:lowcarbonled03

Address:No.2 Dalang Dongyi Street.Liguan Road.Lishui Town,Nanhai


District,Foshan,China

Pure Light Eyes Protection

LOW-CARBON LIGHTING



PURE LIGHT/
EYES/
PROTECTION./

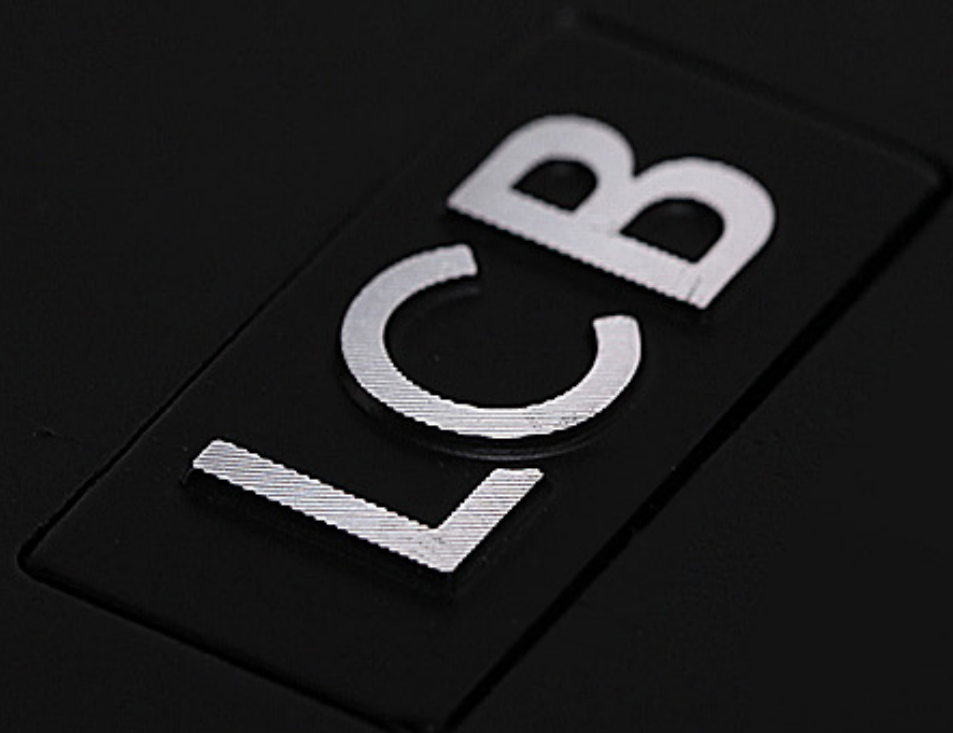

ALWAYS
FOCUS ON
LED ACCENT LIGHTING



TR0202

6°-45° BEAM ANGLE ADJUSTABLE

<p>Model:LC-TR0202-10W Input Voltage:200-240V 50-60Hz LED:CREE COB Watts:10W Lumen:900lm PF:>0.95 Size:D65*H161mm CCT:3000K 4000K 5000K Ra:>80 Beam Angle:6-45°</p>	<p>Model:LC-TR0202-20W Input Voltage:200-240V 50-60Hz LED:CREE COB Watts:20W Lumen:1700lm PF:>0.95 Size:D80*H161mm CCT:3000K 4000K 5000K Ra:>80 Beam Angle:6-45°</p>	<p>Model:LC-TR0202-30W Input Voltage:200-240V 50-60Hz LED:CREE COB Watts:30W Lumen:2700lm PF:>0.95 Size:D93*H161mm CCT:3000K 4000K 5000K Ra:>80 Beam Angle:6-45°</p>
--	---	---

TR0201

FEATURED TYPE

Model:LC-TR0201-10W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:10W
Lumen:900lm
PF:>0.95
Size:D65*H161mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、38、60°

Model:LC-TR0201-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1700lm
PF:>0.95
Size:D80*H161mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、38°

Model:LC-TR0201-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:30W
Lumen:2700lm
PF:>0.95
Size:D93*H161mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、38、55°

Model:LC-TR0201-50W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:50W
Lumen:4000lm
PF:>0.95
Size:D105*H161mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、38°





PURE LIGHT/ EYES/ PROTECTION./



TR0301

BENDING TYPE

Model:LC-TR0301-15W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:15W
Lumen:1200lm
PF:>0.95
Size:D65*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15 24 38 60°

Model:LC-TR0301-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1600lm
PF:>0.95
Size:D80*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15 24 38°

Model:LC-TR0301-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:30W
Lumen:2500lm
PF:>0.95
Size:D94*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15 24 38 55°

Model:LC-TR0301-35W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:35W
Lumen:3000lm
PF:>0.95
Size:D94*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15 24 38 55°





Pure Light, Eyes Protection.

TR05

HOT-SELLING



TR05

HOT-SELLING

Model:LC-TR05-10W

Input Voltage:200-240V 50-60Hz

LED:CREE COB

Watts:10W

Lumen:900lm

PF:>0.95

Size:D65*H90mm

CCT:3000K 4000K 5000K

Ra:>80

Beam Angle:24° 38°

Model:LC-TR05-20W

Input Voltage:200-240V 50-60Hz

LED:CREE COB

Watts:20W

Lumen:1800lm

PF:>0.95

Size:D80*H115mm

CCT:3000K 4000K 5000K

Ra:>80

Beam Angle:24° 38°

Model:LC-TR05-30W

Input Voltage:200-240V 50-60Hz

LED:CREE COB

Watts:30W

Lumen:2700lm

PF:>0.95

Size:D90*H136mm

CCT:3000K 4000K 5000K

Ra:>80

Beam Angle:24° 38° 50°



LC-TR0801&TR0802

MUSEUM LIGHTING

Model:LC-TR0801-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1400lm
PF:>0.95
Size:D80*H223mm
CCT:3000K 4000K 5000K
Ra:>90
Beam Angle:20-70°

Model:LC-TR0802-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1800lm
PF:>0.95
Size:D80*H223mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15° 24° 38°

AD2602

ANTI-GLARE& STRETCHABLE

Model:LC-AD2602-10W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:10W
Lumen:800lm
PF:>0.95
Size:D60*H105mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、36°

Model:LC-AD2602-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1600lm
PF:>0.95
Size:D70*H125mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、36°

Model:LC-AD2602-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:30W
Lumen:2700lm
PF:>0.95
Size:D80*H140mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15、24、36°



PURE LIGHT/ EYES/ PROTECTION./

TR0203

ZOOMABLE&DIMMABLE



Model:LC-TR0203-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:30W
Lumen:2400lm
PF:>0.95
Size:D93*H210mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15-55°



AD2604

COMPACT TYPE

Model:LC-AD2604-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1600lm
PF:>0.95
Size:D90*H76mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:12 24 36°

Model:LC-AD2604-40W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:40W
Lumen:3500lm
PF:>0.95
Size:D109*H171mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:12 24 36°



LCB 诺可

**PURE LIGHT/
EYES/
PROTECTION./**



TR08

HIGH-END CLOTHES LIGHTING

Model:LC-TR08-30W

Input Voltage:200-240V 50-60Hz

LED:CREE COB

Watts:30W

Lumen:2700lm

PF:>0.95

Size:D168*H160mm

CCT3000K 4000K 5000K

Ra:>80

Beam Angle:24°





AD301

LEAF TYPE

Model:LC-AD301-10W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:10W
Lumen:800lm
PF:>0.95
Size:D60*H160mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:24°

Model:LC-AD301-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1600lm
PF:>0.95
Size:D80*H180mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:24°

Model:LC-AD301-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:30W
Lumen:2400lm
PF:>0.95
Size:D100*H205mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:24°



LC-AD701

THICK TYPE

Model:LC-AD701-35W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:35W
Lumen:2900lm
PF:>0.95
Size:D105*H150mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:24°




AD201

HIGH POWER

Model:LC-AD201-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1600lm
PF:>0.95
Size:D96*H128mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:12 24 36°

Model:LC-AD201-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:30W
Lumen:2900lm
PF:>0.95
Size:D120*H157mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:12 24 36°

Model:LC-AD201-40W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:40W
Lumen:3400lm
PF:>0.95
Size:D120*H157mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:12 24 36°

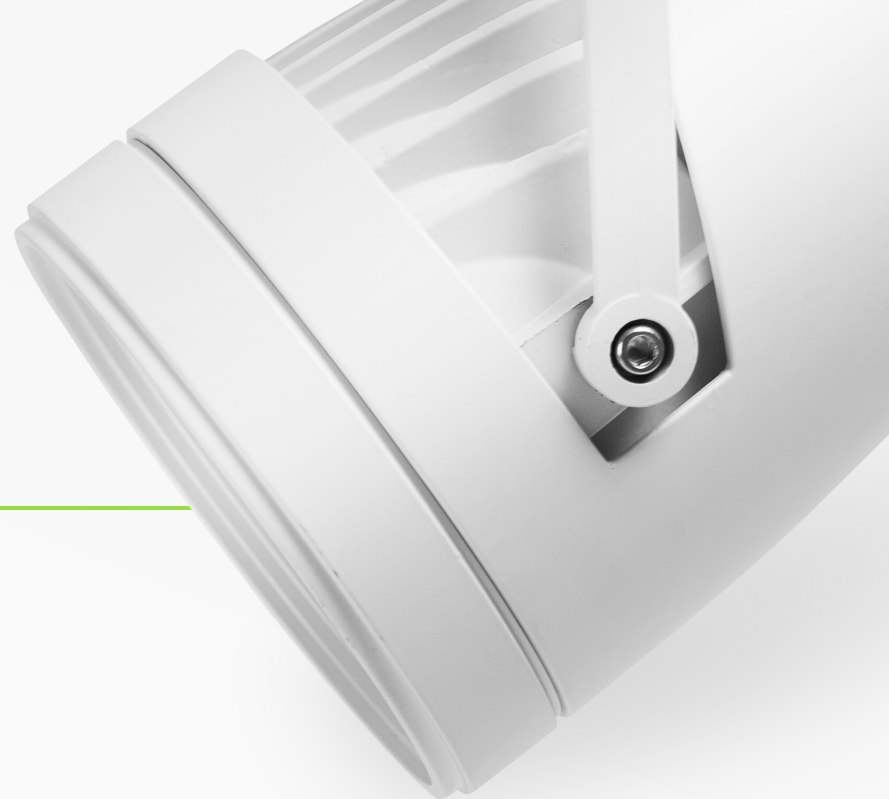

LC-AM0101

CEILING MOUNTED LIGHT

Model:LC-AM0101-10W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:10W
Lumen:800lm
PF:>0.95
Size:D65*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15° 24° 38° 60°

Model:LC-AM0101-20W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1800lm
PF:>0.95
Size:D80*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15° 24° 38°


Model:LC-AM0101-30W
Input Voltage:200-240V 50-60Hz
LED:CREE COB
Watts:20W
Lumen:1800lm
PF:>0.95
Size:D93*H200mm
CCT:3000K 4000K 5000K
Ra:>80
Beam Angle:15° 24° 38°





LCB 诺可

PURE LIGHT/ EYES/ PROTECTION./

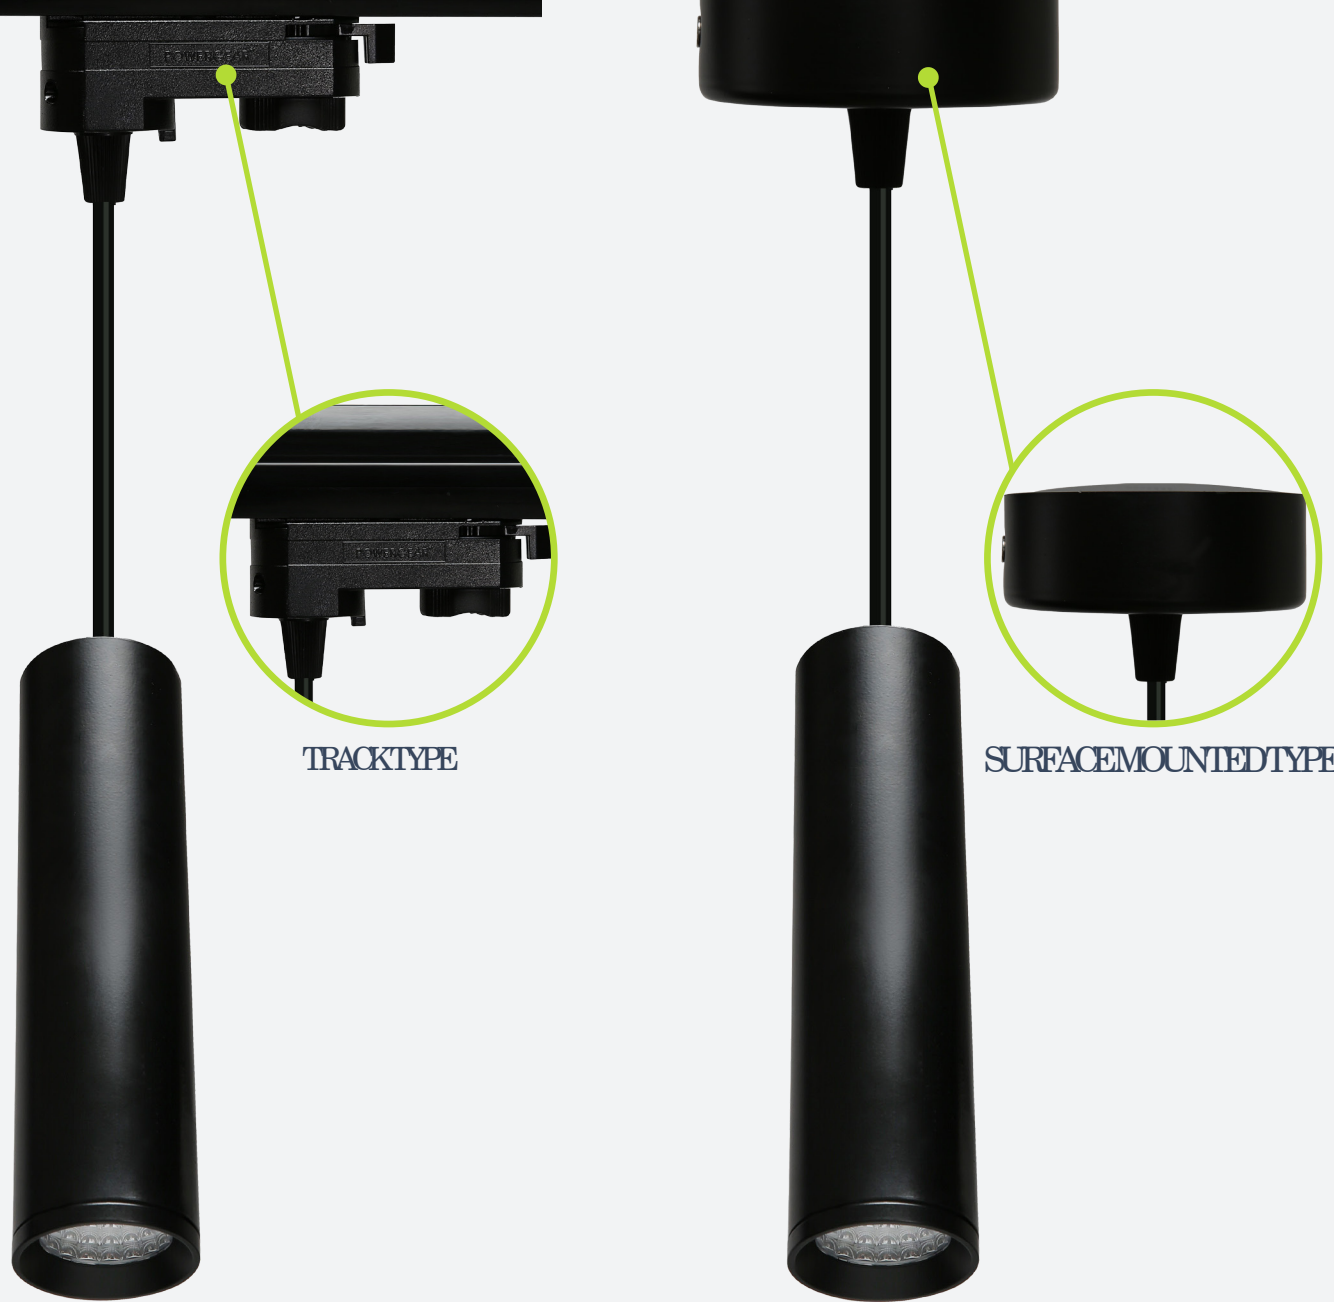

TRACKTYPE

SURFACEMOUNTEDTYPE

PD01

LED PENDANT LIGHT

Model:LC-PD01-15W
 Input Voltage:220-240V
 LED:CREE COB
 Watts:15W
 Lumen:1200lm
 PF:0.95
 Size:D65*H250mm
 CCT:3000K 4000K 5000K
 Ra:>80
 Beam Angle:15 24 38 55°

Model:LC-PD01-25W
 Input Voltage:220-240V
 LED:CREE COB
 Watts:25W
 Lumen:2100lm
 PF:0.95
 Size:D80*H250mm
 CCT:3000K 4000K 5000K
 Ra:>80
 Beam Angle:15 24 38°

Model:LC-PD01-35W
 Input Voltage:220-240V
 LED:CREE COB
 Watts:35W
 Lumen:3000lm
 PF:0.95
 Size:D80*H250mm
 CCT:3000K 4000K 5000K
 Ra:>80
 Beam Angle:15 24 38°




PURE LIGHT/ EYES/ PROTECTION./

Three Circuits Track System(Square Shape)

4线方型导轨系统

Length/长度规格

1000mm 1500mm
2000mm 3000mm




WH BK GY



- Three circuits track is available in 1, 2 and 3 meter lengths.
- Surface Material: High quality aluminum to ensure the strength of the tracks.
- Conductive Material: Pure copper, with good electrical conductivity.
- Inner Strip Material: PVC strip, with excellent electrical insulation properties.
- White, black finishes as standard. Also available in silver finish.
- Kits are available for wire suspension.
- Certificate: CE, TUV, ROHS
- OEM & ODM Accepted.
- 4线导轨条选料严谨，做工精细。优质铝合金型材外壳保证导轨的强度；
- 全新PVC胶条具有优良的绝缘性能，确保安全；
- 紫铜导电芯确保优良的导电性能。可根据设计需要，接驳多盏灯具，达到优良的照明效果。

Three Circuits Track Standard Connectors


4线方型导轨接驳器

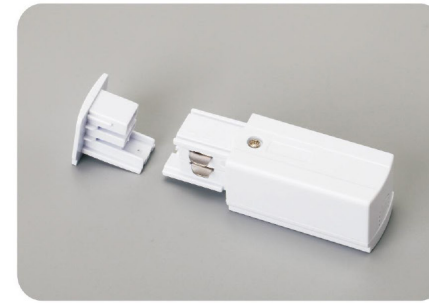


Power Connector&End Cup 电源接驳器+尾塞

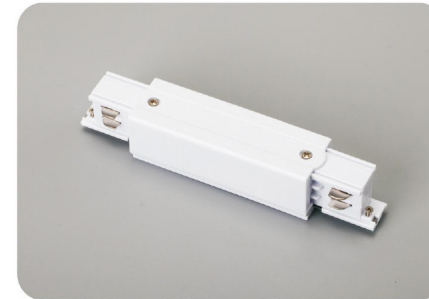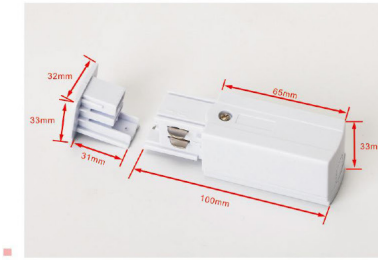



Straight Connector 直连接驳器

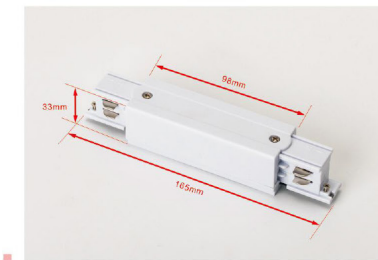


Mini Straight Connector 迷你直连接驳器

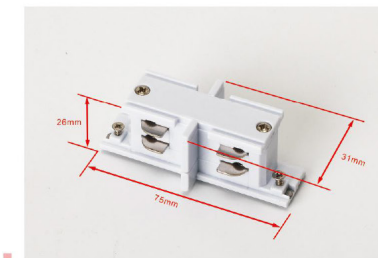

Mini Straight Connector 迷你直连接驳器（无根）

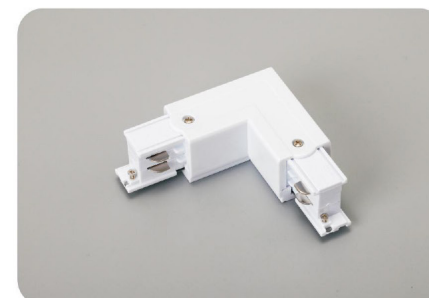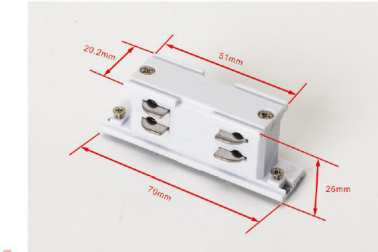

“L” Connector-R 90° 接驳器（左）


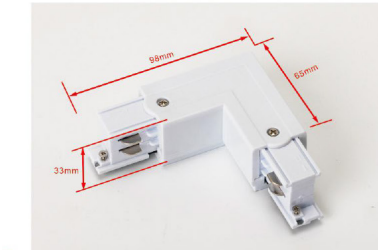






Three Circuits Track Standard Connectors

4线方型导轨接驳器



“L” Connector-L 90°接驳器 (右)

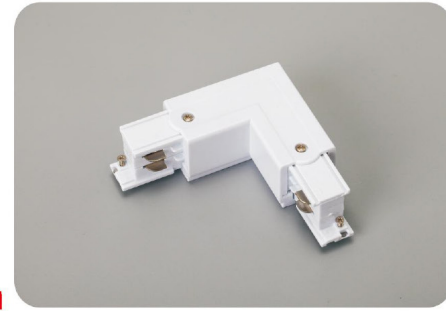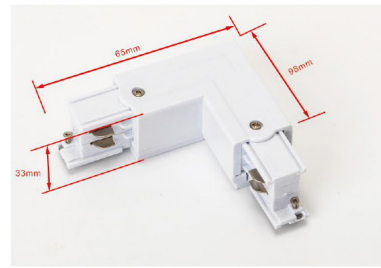



“T” Connector-L2 三向接驳器 (左1)

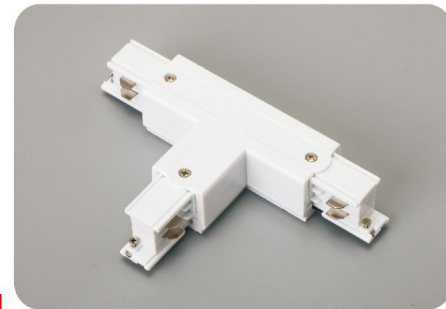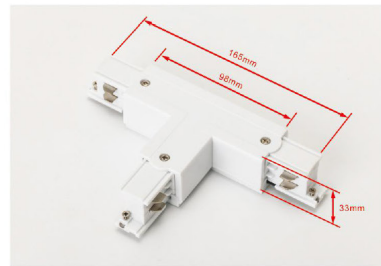



“T” Connector-L2 三向接驳器 (左2)

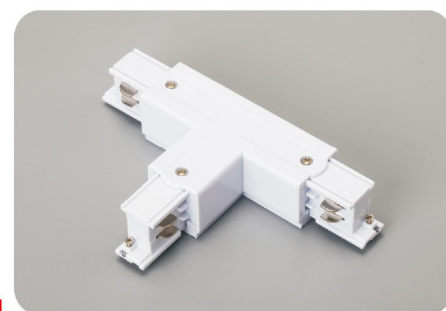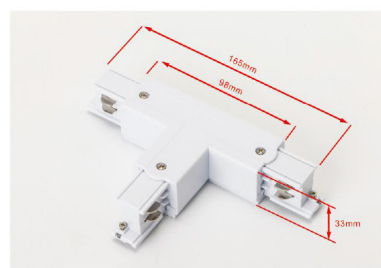

“T” Connector-L2 三向接驳器 (右1)

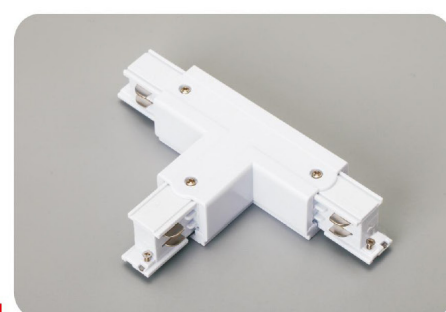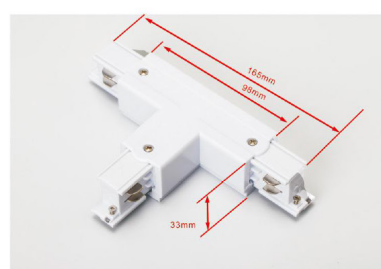


“T” Connector-L2 三向接驳器 (右2)

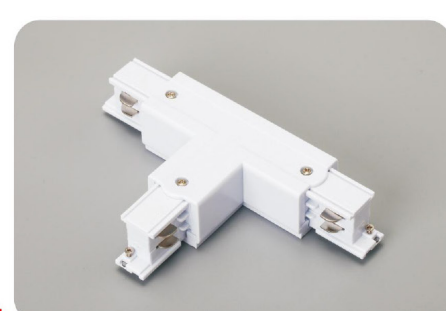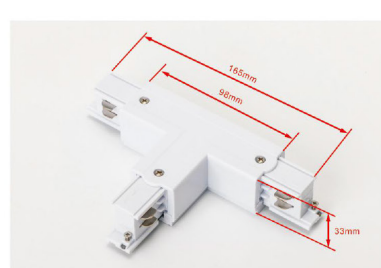


Three Circuits Track Standard Connectors



4线方型导轨接驳器

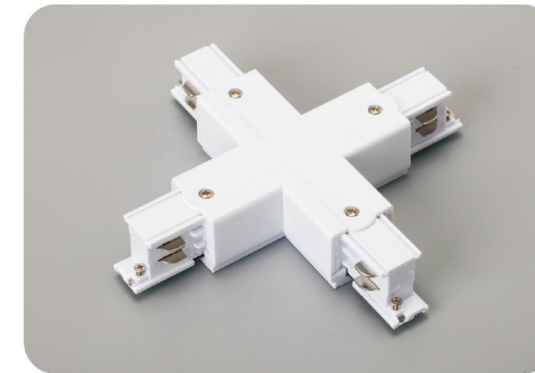


“X” Connector 四向接驳器

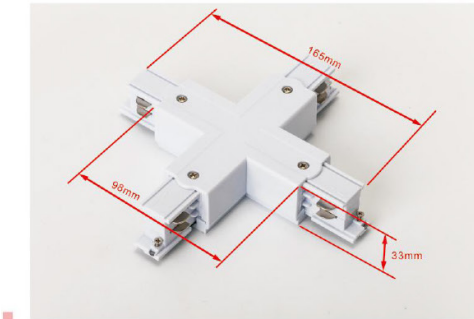

Flexible Connector 角度接驳器 (软接)

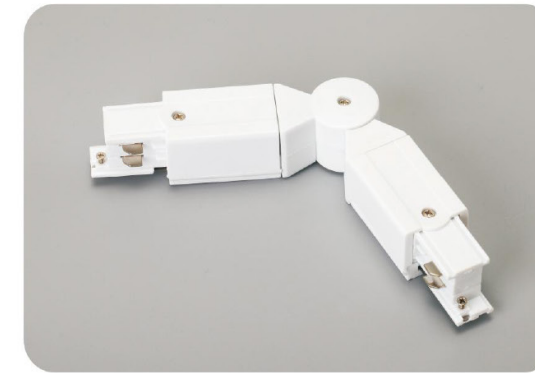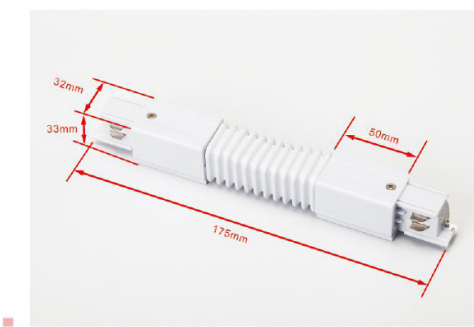

Flexible Connector 角度接驳器 (硬接)

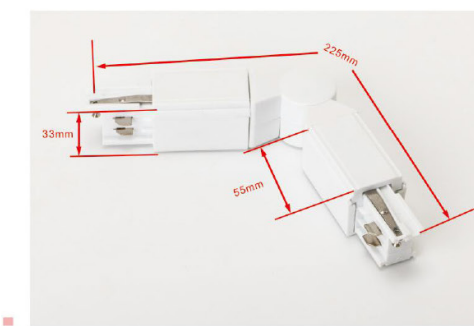

Suspension Kit 吊装组件




Three Circuits Track System(Round Shape)

4线圆型导轨系统

Length/长度规格

1000mm 1500mm
2000mm 3000mm




WH BK GY


- Three circuits track is available in 1, 2 and 3 meter lengths.
- Surface Material: High quality aluminum to ensure the strength of the tracks.
- Conductive Material: Pure copper, with good electrical conductivity.
- Inner Strip Material: PVC strip, with excellent electrical insulation properties.
- White, black finishes as standard. Also available in silver finish.
- Kits are available for wire suspension.
- Certificate: CE, TUV, ROHS
- OEM & ODM Accepted.
- 4线导轨条选料严谨，做工精细。优质铝合金型材外壳保证导轨的强度；
- 全新PVC胶条具有优良的绝缘性能，确保安全；
- 紫铜导电芯确保优良的导电性能。可根据设计需要，接驳多盏灯具，达到优良的照明效果。

Three Circuits Track Standard Connectors



4线圆型导轨接驳器

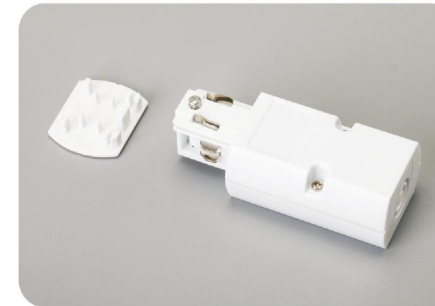


Power Connector&End Cup-电源接驳器+尾塞

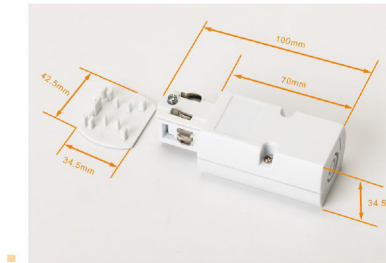


Mini Straight Connector 迷你直连接驳器

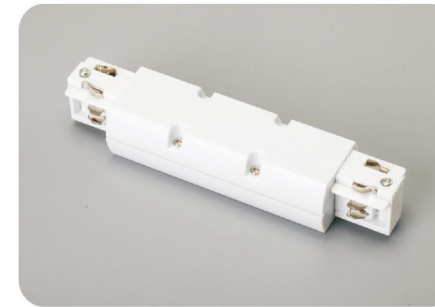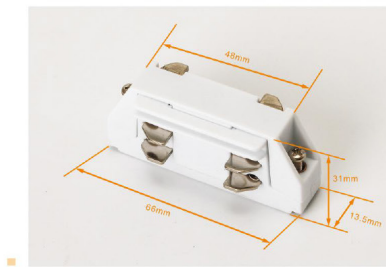


Straight Connector 直连接驳器

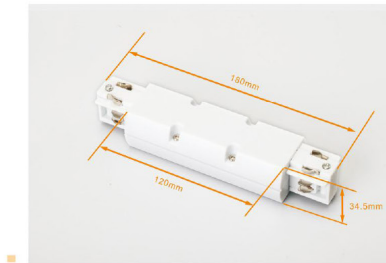

“L” Connector-L 90°接驳器（左）

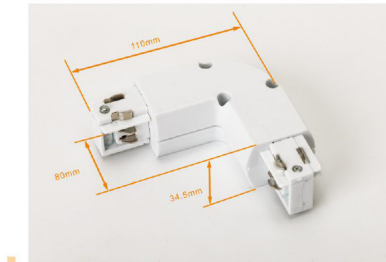



“L” Connector-R 90° 接驳器（右）

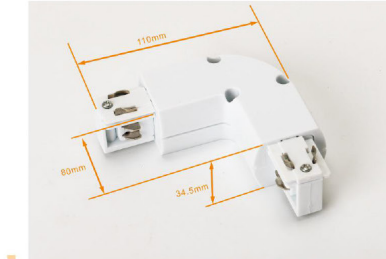



Three Circuits Track Standard Connectors

4线圆型导轨接驳器


“T” Connector-L1 三向接驳器 (左1)

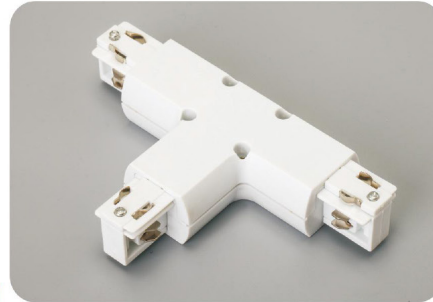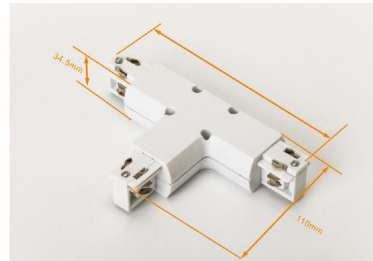



“T” Connector-L2 三向接驳器 (左2)

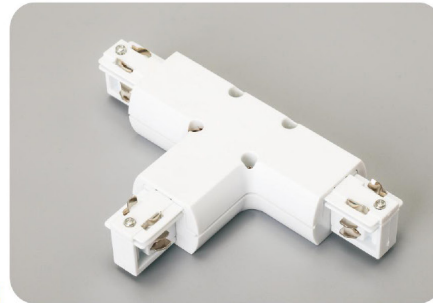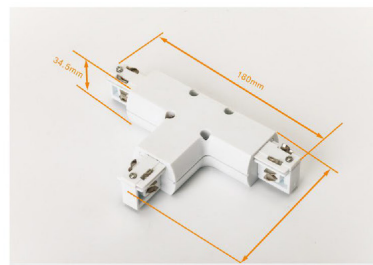


“T” Connector-R1 三向接驳器 (右1)

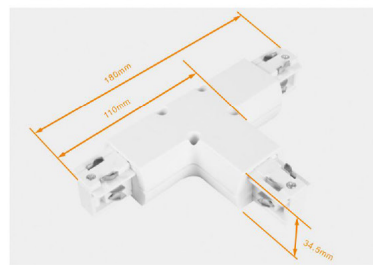

“T” Connector-R1 三向接驳器 (右2)

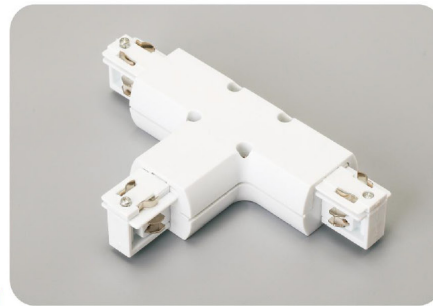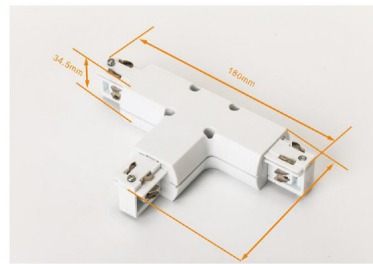

“X” Connector 四向接驳器

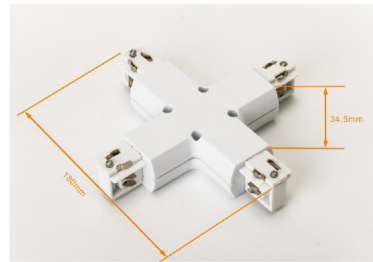


Three Circuits Track Standard Connectors

4线圆型导轨接驳器



Flexible Connector 角度接驳器(软接)

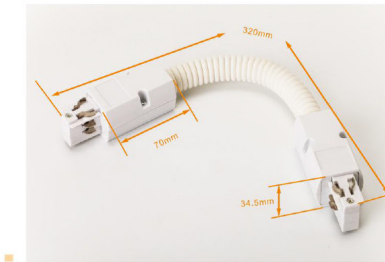


Suspension Kit 吊装组件



Installation Instruction

安装示意图

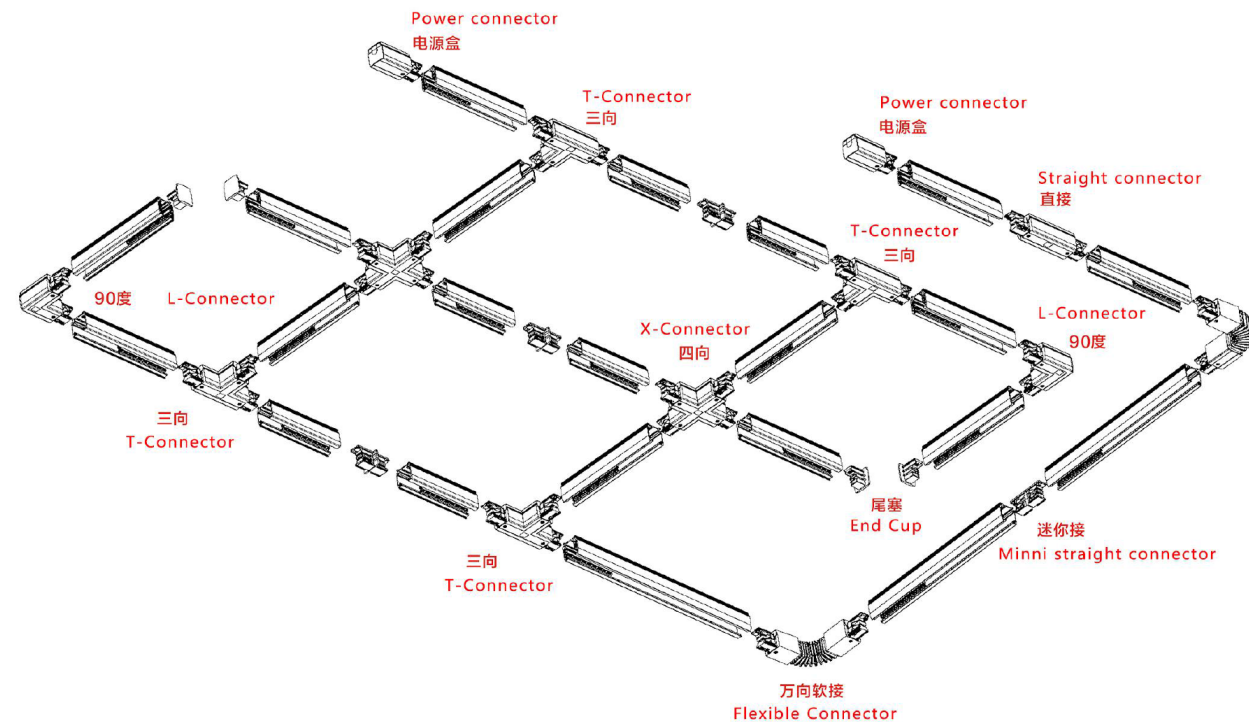

1. variety of connectors makes the installation more flexible and convenient. It can meet various lighting requirements and also optimize the building' s lighting effects.
2. Haotai' s lighting track system is easy to use and more safety. Each series has equipped with I Connector, L Connector, T Connector, X Connector and Flexible Connector in right & left version.

1.多种安装接驳，可根据设计方案，实施多种安装方式，满足各类照明需要，实现多方位照明，使整个店铺达到最优的照明效果
2.每个系列的导轨系统，均配有I接，L接，T接，X接，万向接，而且有左右方向之分，使用方便，灵活，美观，安全

